



Centre Drive Duplex



Italian Leader Worldwide

EUROMAC
SLITTERS REWINDERS

Euromac Costruzioni Meccaniche S.r.l. - Strada Statale 31 n.6 - 15030 Villanova Monf. - Italia
TEL. +39 0142.483195 - FAX +39 0142.483611 - www.euromacslitters.com • euromac@euromacslitters.com



TB-6C Centre Drive Duplex

UNWIND - Separate Shaftless or shafted unwinder • Dancing roller for tension control • Pneumatic Brake or electric Motor • Automatic webguiding system.


SLITTING - Slitting system with

oscillating Razorblades and/or Shear-cut rotary blades • Knifeholders on shaft or linear bearing guides • Specific web path for Wrap-cut or Tangent-cut • Manual or semi-automatic or full automatic positioning of slitting blades.

WEB PATH - Overhead web path • Aluminum idler rollers • Driven main pull roll with own pressure roller or "S" wrap.

REWIND - Duplex Centre wind drive assisted by lay-on rolls • Differential friction shafts or air expanding shafts • Multiple systems for "centre-wind" drive • Easy roll offloading (strip-off) on manual or motorised trolleys.

AUTOMATION - PLC for all machine functions and controls • Touch screen digital operator panel • Modem for remote monitoring.

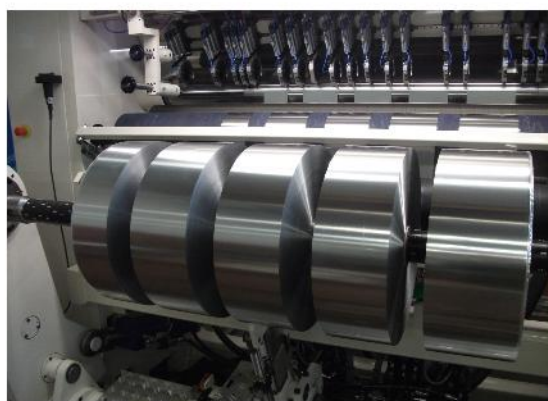

MAIN SPECIFICATION	Standard	Option
Maximum web widths	1.400 to 2.500 mm	(or Custom)
Maximum rewind diameter	600 to 1.250 mm	(or Custom)
Maximum unwind diameter	800 to 1.800 mm	(or Custom)
Webguide stroke	± 75 mm	(or Custom)
Core diameter	76, 152 mm	(or Custom)
Maximum working speed	500-1000 m/min	(or Custom)
Web tension range	Customised	
Rewind system	Centre and Lay-on rolls	(Gap rewind)
Slitting	Oscillating razors	(Shear)
Material	Monolayers (CPP, BOPP, BOPA, BOPP, PVC, PET), Laminates, Coextrusion films, Paper, Paper/PE Metalised films.	
Best Choice for	Labelstock Papers	